

Blocking valve, Series QR1-AAN

- Qn 1→2 = 300 l/min
- External thread
- G 1/8
- push-in fitting
- Ø 4



Version	Poppet valve
Working pressure min./max.	0 ... 10 bar
Ambient temperature min./max.	0 ... 60 °C
Medium temperature min./max.	0 ... 60 °C
Medium	Compressed air
Weight	See table

Technical data

Part No.	Port 1	Port 2	Flow	Delivery unit	Weight
			Qn 1→2		
R412005526	G 1/8	Ø 4	300 l/min	10 piece	0,011 kg
R412005527	G 1/8	Ø 6	700 l/min	10 piece	0,013 kg
R412005528	G 1/4	Ø 6	700 l/min	10 piece	0,021 kg
R412005529	G 1/4	Ø 8	900 l/min	10 piece	0,02 kg

Technical information


When connecting/disconnecting the compressed air tubing and shut-off valve, the flow is released/blocked.

Technical information

Material	
Housing	Brass, nickel-plated
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

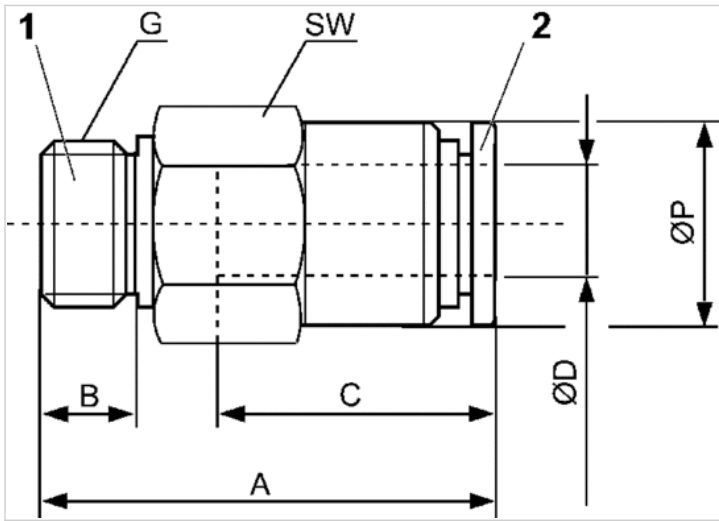

Dimensions

Part No.	G	Ø D	A	B	C	SW	Ø P
R412005526	G 1/8	Ø 4	26.6	5	16	14	10
R412005527	G 1/8	Ø 6	26.9	5	17	14	12
R412005528	G 1/4	Ø 6	29.4	6	17	17	13
R412005529	G 1/4	Ø 8	33.8	6	18.5	17	14