


5/2-directional valve, Series 581, size 2

- ISO 5599-1
- ISO 2
- 5/2
- with air spring return
- $Q_n = 2700$ l/min
- Compressed air connection output Base plate ISO 5599-1
- Electrical connection Plug, EN 175301-803, form A
- Manual override with detent, without detent

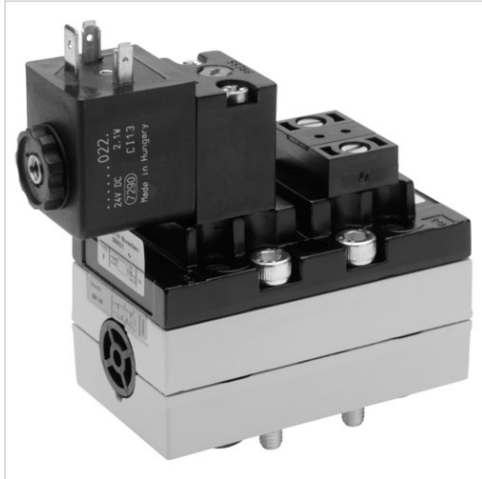

Version	Spool valve
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Connection type	Plate connection
Standards	ISO 5599-1, ISO 2
Working pressure min./max.	See table below
Control pressure min./max.	2,7 ... 10 bar
Ambient temperature min./max.	-15 ... 50 °C
Medium temperature min./max.	-15 ... 50 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m ³
Nominal flow Q_n	2700 l/min
Flow conductance C	10,8 l/(s*bar)
Protection class with connection	IP65
Compatibility index	14
Duty cycle	100 %
Typ. switch-on time	17 ms
Typ. switch-off time	40 ms
Mounting screw	with hexagon socket
Mounting screw tightening torque	3,5 Nm
Weight	0,56 kg

Technical data

Part No.		MO	Operationalvoltage DC	Operationalvoltage AC 50 Hz	Voltage tolerance DC
5812670650		R R R R R R R R	24 V	-	-10% / +10%
5812670450			-	230 V	-
5812671650			24 V	-	-10% / +10%
5812671450			-	230 V	-
5812672650			24 V	-	-10% / +10%
5812672450			-	230 V	-
5812673650			24 V	-	-10% / +10%
5812673450			-	230 V	-

Part No.	Voltage tolerance AC 50 Hz	Power consumption DC	Holding power AC 50 Hz	Switch-on power AC 50 Hz

Part No.	Voltage tolerance AC 50 Hz	Power consumption DC	Holding power AC 50 Hz	Switch-on power AC 50 Hz
5812670650	-	2 W	-	-
5812670450	-10% / +10%	-	4,8 VA	7 VA
5812671650	-	2 W	-	-
5812671450	-10% / +10%	-	4,8 VA	7 VA
5812672650	-	2 W	-	-
5812672450	-10% / +10%	-	4,8 VA	7 VA
5812673650	-	2 W	-	-
5812673450	-10% / +10%	-	4,8 VA	7 VA

Part No.	Pilot	Working pressure min./max.	Compatibility index
5812670650	internal	2,7 ... 10 bar	14
5812670450	internal	2,7 ... 10 bar	14
5812671650	internal	2,7 ... 10 bar	14
5812671450	internal	2,7 ... 10 bar	14
5812672650	external	-0,95 ... 10 bar	14
5812672450	external	-0,95 ... 10 bar	14
5812673650	external	-0,95 ... 10 bar	14
5812673450	external	-0,95 ... 10 bar	14

Part No.	Electrical connection Pilot valve	Throttle
5812670650	Plug EN 175301-803, form A	-
5812670450	Plug EN 175301-803, form A	-
5812671650	Plug EN 175301-803, form A	with throttle
5812671450	Plug EN 175301-803, form A	with throttle
5812672650	Plug EN 175301-803, form A	-
5812672450	Plug EN 175301-803, form A	-
5812673650	Plug EN 175301-803, form A	with throttle
5812673450	Plug EN 175301-803, form A	with throttle

Differential piston, signal 14 has priority, The minimum pilot pressure at port 14 is dependent on the pressure in port 1., Nominal flow Qn at 6 bar and $\Delta p = 1$ bar, An operating pressure of up to 16 bar is possible in the version with manual override without detent.

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Housing	Aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

